



MOUNTING INSTRUCTION SHEET

Cosmia AluP SUS

1

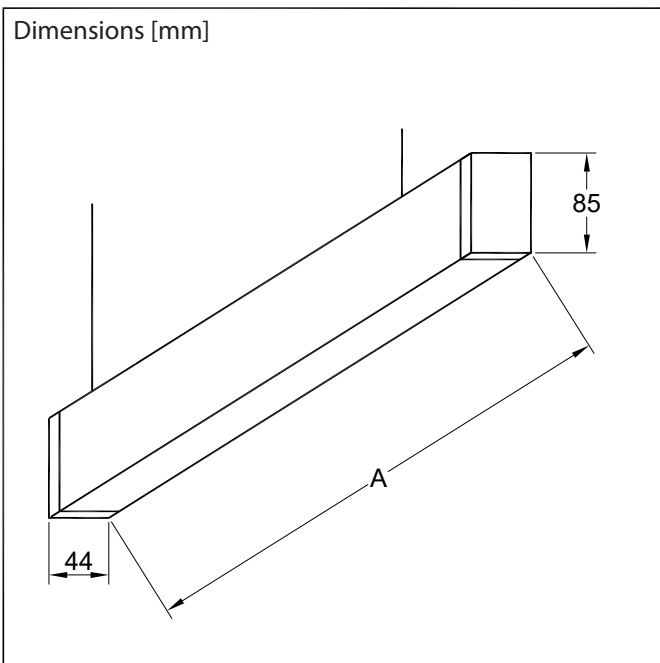


2

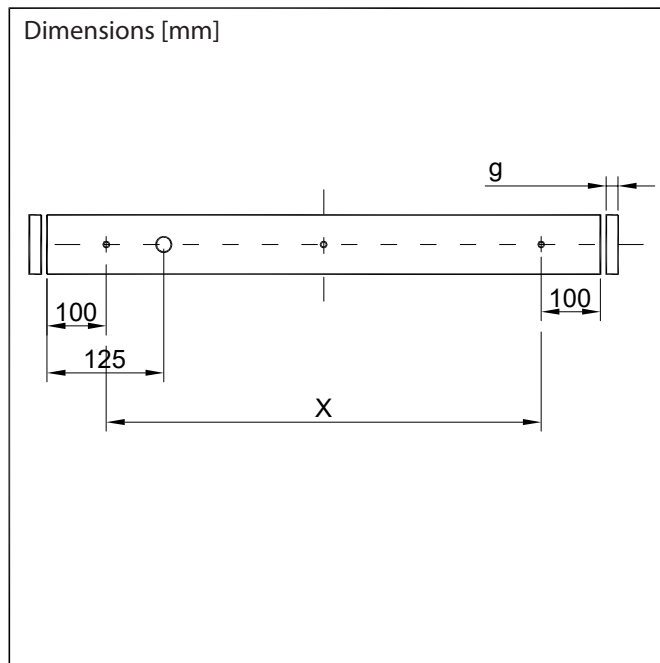

3

LED Version			
	X	A	
2xLED 650/1100	390	590	
3xLED 650/1100	680	880	
4xLED 650/1100	970	1170	
5xLED 650/1100	1260	1460	
6xLED 650/1100	1550	1750	
7xLED 650/1100	1840	2040	
8xLED 650/1100	2130	2330	
non-standard version	real measure		

4

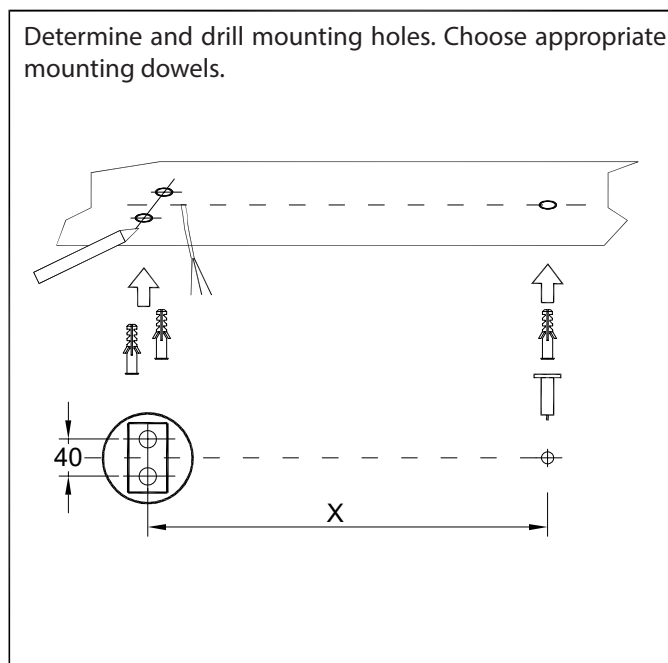


MOUNTING INSTRUCTION SHEET

Cosmia AluP SUS


5

Mount brackets

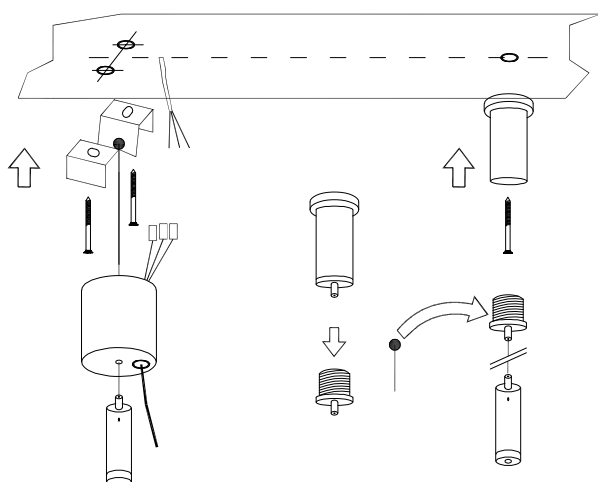


6

Hang luminaire's body on prepared suspension set

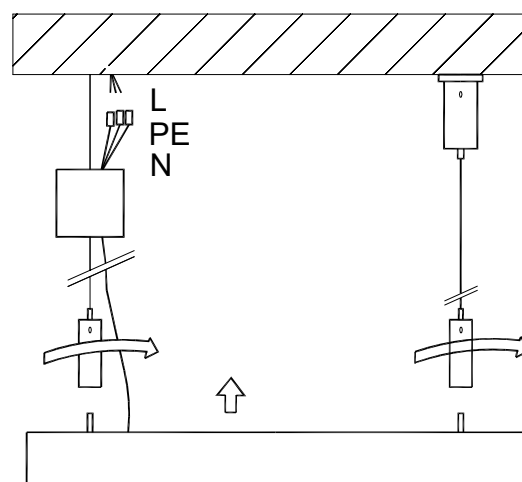


7

Connect the power supply to the connector (Fig. A or B)

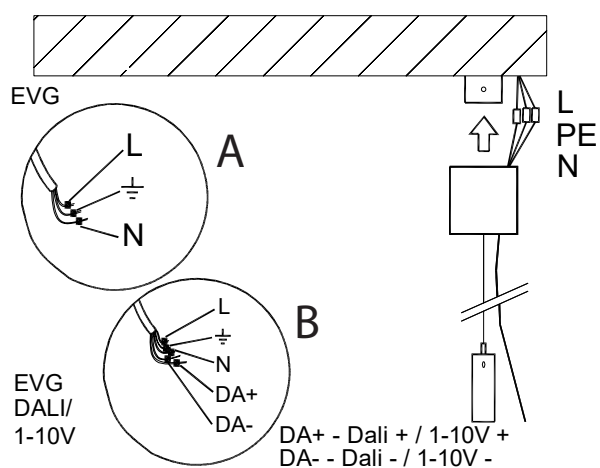

8

Loosen the rope stopper, pull the cover to the ceiling. Tighten the rope stopper by blocking the position of the cover

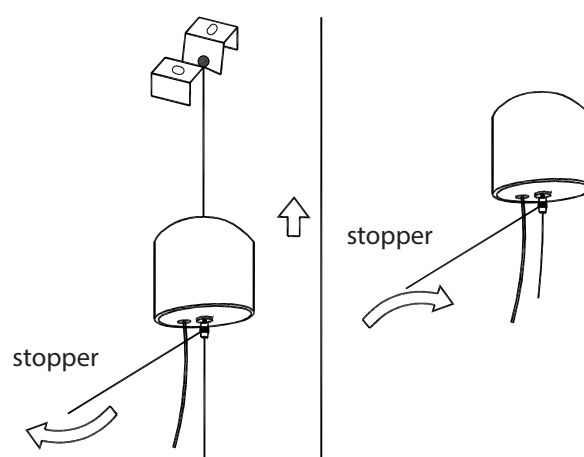

MOUNTING INSTRUCTION SHEET

Cosmia AluP SUS

9


Standard product -> see point 16

Non-standard products -> point 10-16

Line assembly or assembly at an angle: Mount the next fitting according to the instructions above and proceed to point 10


10

Put on electrostatic gloves, unscrew and remove the LED module from the luminaire, protect it up to re-assembly time.



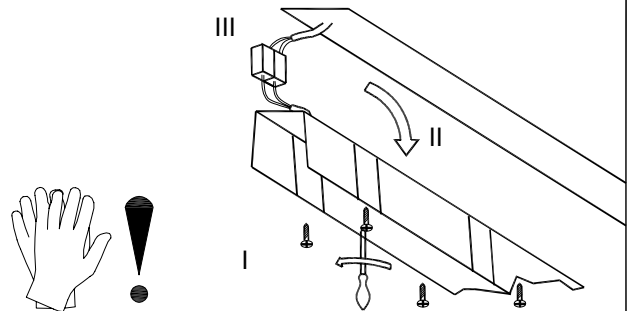


11

In the case of the line: Install another lighting fixture according to instructions as above, mount the fast connectors: electrical and mechanical.

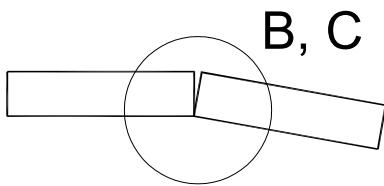

Bottom view

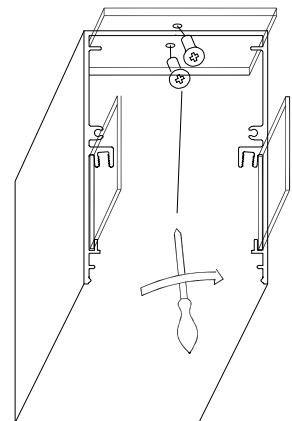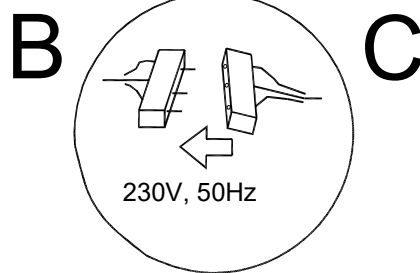




MOUNTING INSTRUCTION SHEET

Cosmia AluP SUS

12


In the case of the angular mounting: Install another lighting fixture according to instructions as above, mount the fast connectors: electrical and mechanical.

Bei der Winkelmontage: Eine weitere Leuchte nach o.g. Anweisungen installieren. Zur Montage bitte die Steckverbinder verwenden

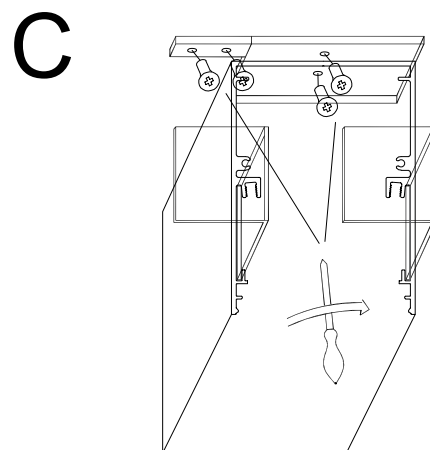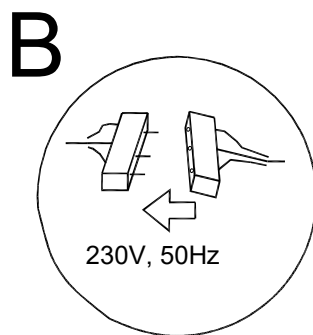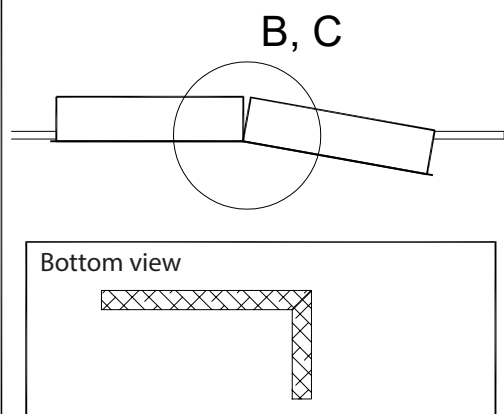


13

Put on electrostatic gloves, connect LED power supply (I), place LED modules in housing (II), screw LED module to housing body (III)

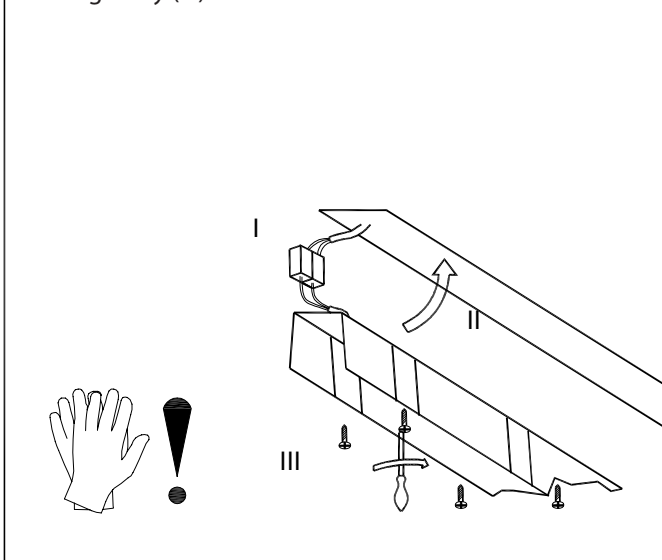

14

In the case of LED luminaires with > 5 LED pieces, screw another LED module to the body luminaire and connect using fastconnector

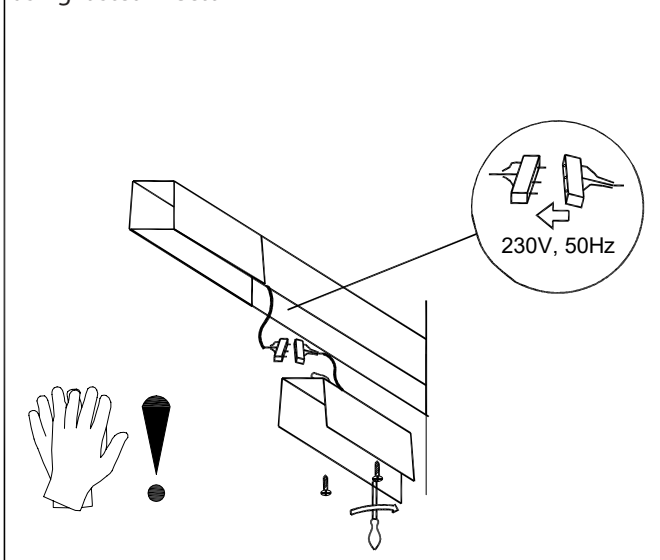


MOUNTING INSTRUCTION SHEET

Cosmia AluP SUS

15

Install diffusers.

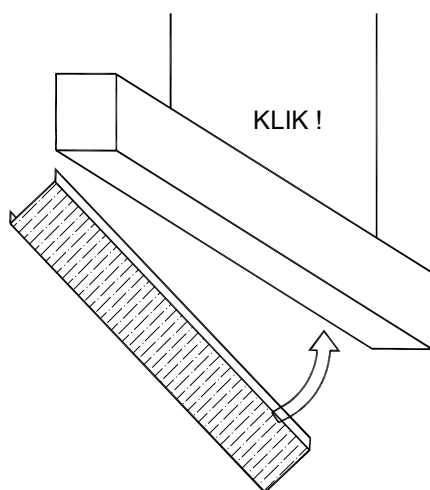

16

Clean the luminaire .Turn on power supply

