


# MOUNTING INSTRUCTION SHEET FOR

## Cosmia AluP R


1

Measure the length of luminaire A

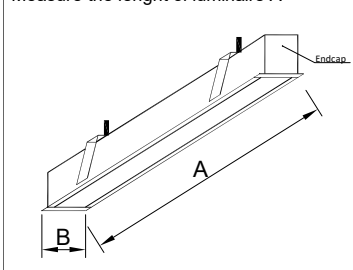


2

Dimensions

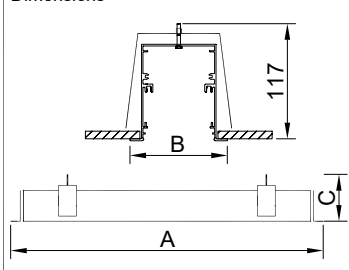

3

Determine the mounting hole (d x e)

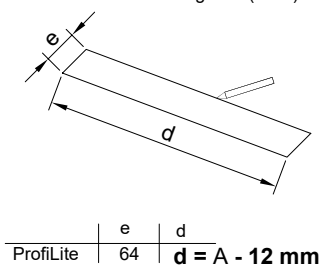


4

LED Version

LED Type	A
2xLED 650/1100	600
3xLED 650/1100	880
4xLED 650/1100	1160
5xLED 650/1100	1440
6xLED 650/1100	1720
7xLED 650/1100	2000
8xLED 650/1100	2280


5

Use electrostatic gloves to remove the diffuser and LED modules from the body of the luminaire. Secure until assembly time. Pass the power supply cable through the body.

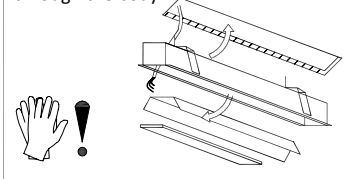


6

Mount the body of the luminaire into ceiling.

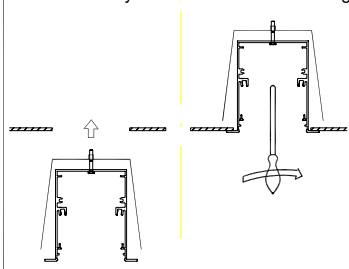


7

Connect power supply into luminaire body

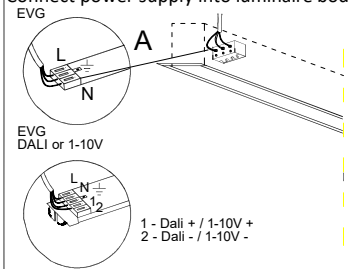


8

Put on electrostatic gloves, connect power supply to LED (I), insert the LED modules into a body of the luminaire (II), screw the LED module to the body of the luminaire (III)

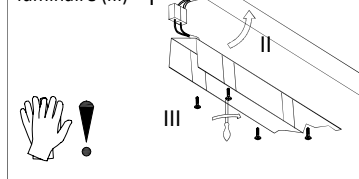


9

In the case of LED luminaires with > 5 LED pieces, screw another LED module to the body luminaire and connect using fastconnector

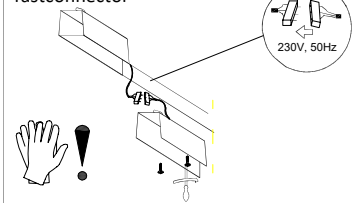


10

Remove the protective foil from the diffuser before installation it in the housing.

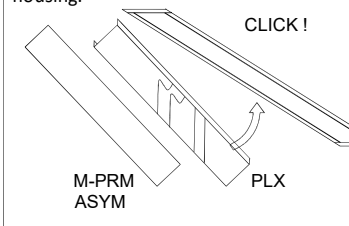


11

In the case of the line: Install another lighting fixture according to instructions as above, mount the fast connectors: electrical and mechanical.

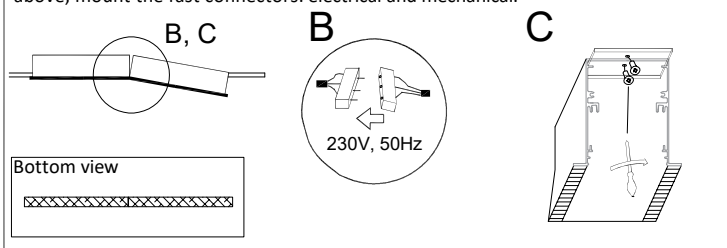


12

Installation of diffusers with a length more than 3 m

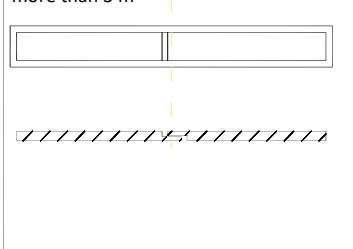

13

In the case of the angular mounting: Install another lighting fixture according to instructions as above, mount the fast connectors: electrical and mechanical.

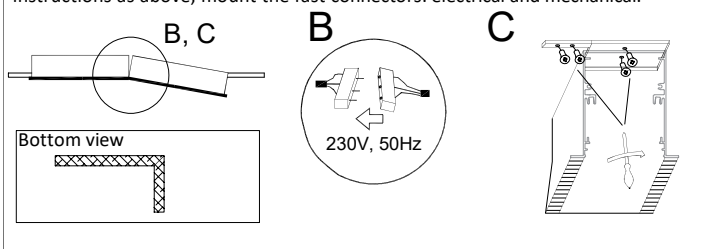

14

Turn on power supply

